

Instrumentation Quick - Connects



SQC SERIES

Features

- Simple push-pull action to connect and disconnect lines-no tools required.
- Plug and body are available valved or unvalved. valves automatically open when connected and shut off when disconnected to minimize the loss of liquids or gases.



Table of Dimensions

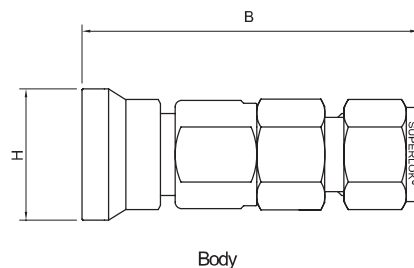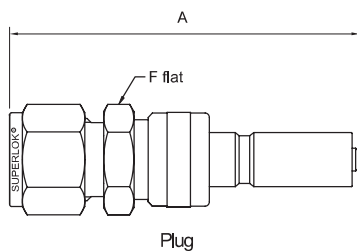

Plug

Part Number			Cv		End Connection Type	A		F
			SO	DO		SO	DO	
SQC1P -SO	SQC1P -DO	S2	0.08	0.08	1/8" Superlok		70.4	15.9
		S4			1/4" Superlok		61.5	
		S6M			6mm Superlok			
		M2N	0.4	0.2	1/8" Male NPT		54.1	
		M4N(R)			1/4" Male NPT(PT)		57.9	
		F2N			1/8" Female NPT		52.6	
		F4N(R)			1/4" Female NPT(PT)		58.9	
						19.1		
SQC2P -SO	SQC2P -DO	S6	1.5	0.5	3/8" Superlok		67.1	19.1
		S10M			10mm Superlok		70.4	
		M4N			1/4" Male NPT		61.9	
		M6N(R)	1.6	0.5	3/8" Male NPT(PT)		62.7	
		F4N	1.5	0.5	1/4" Female NPT			
		F6N(R)	1.6	0.5	3/8" Female NPT(PT)			22.2
SQC3P -SO	SQC3P -DO	S8	3.3	1.5	1/2" Superlok		80.3	23.8
		S12M			12mm Superlok			
		M8N(R)	3.1	1.3	1/2" Male NPT(PT)		77.2	
		F8N(R)			1/2" Female NPT(PT)		76.7	27.0

• SO : Single shutoff type • DO : Double shutoff type

Body

Part Number		End Connection		B	H
		Type			
SQC1B	S2	1/8" Superlok	57.4	23.1	
	S4	1/4" Superlok	58.4		
	S6M	6mm Superlok			
	M2N	1/8" Male NPT	51.1		
	M4N(R)	1/4" Male NPT(PT)	56.9		
	F2N	1/8" Female NPT			
	F4N(R)	1/4" Female NPT(PT)	61.5		
SQC2B	S6	3/8" Superlok	65.5	26.2	
	S10M	10mm Superlok	68.1		
	M4N	1/4" Male NPT	60.5		
	M6N(R)	3/8" Male NPT(PT)			
	F4N	1/4" Female NPT	64.5		
	F6N(R)	3/8" Female NPT(PT)	65.3		
SQC3B	S8	1/2" Superlok	78.5	30.7	
	S12M	12mm Superlok			
	M8N(R)	1/2" Male NPT(PT)	75.4		
	F8N(R)	1/2" Female NPT(PT)	81.8		

• All dimensions in millimeters unless specified as "inch". Dimension are for reference only, subject to change

Materials of Construction

Component	Material
Body	SS316/A276
Housing	
Double shut off stem	
Double shut off stem retainer	
Body valve	
Body insert	
Single shut off stem retainer	
O-ring	Viton
Spring	SS304
Body sleeve	SS316/A276
Plug sleeve	
Locking Balls	

Insertion Depth

Series	Depth, in.(mm)	
	SO	DO
SQC 1	1.09(27.7)	1.15(29.2)
SQC 2	1.18(30.0)	1.30(33.0)
SQC 3	1.48(37.6)	1.68(42.7)

Spillage

Spillage is the amount of system fluid that escapes when a quick-connect is uncoupled (double shut off only)

Series	SPILLAGE
SQC 1	0.3 cm ³
SQC 2	1.0 cm ³
SQC 3	3.0 cm ³

Pressure-Temperature Ratings

Temperature °F (°C)	316 SS with Fluorocarbon FKM O-ring		
	SQC 1	SQC 2	SQC 3
	Pressure Rating, coupled, psig (bar)		
70 (20)	3000 (206)	1500 (103)	750 (51.6)
400 (204)	250 (17.2)		

Maximum Flow Rate Water at 70°F(20°C)

Series	SQC 1	SQC 2	SQC 3
U.S gal/min	4	6	10
L/min	15	22	37

Overall Length

To calculate overall length in the coupled position, subtract the insertion depth from any overall plug and body combination length

Option

BODY & PLUG PROTECTOR

Body & Plug Protectors guard against damage and contaminants when bodies and plug are uncoupled.

Series	Ordering Number	
	Body Protector	Plug Protector
SQC 1	SQC1 - BP	SQC1 - PP
SQC 2	SQC2 - BP	SQC2 - PP
SQC 3	SQC3 - BP	SQC3 - PP

Ordering Information

Example : **SQC2P** - **S** **6** - **DO** - **SS**

1 2 3 4 5

1. Body Series

SQC1B
SQC2B
SQC3B

Plug Series

SQC1P
SQC2P
SQC3P

2. End Connection

S : SUPERLOK Tube Fitting
F : Female Thread
M : Male Thread

3. End Connection Size

Tube O.D Designation

Tube O.D (inch)	1/4	3/8	1/2
Designation	4	6	8
Tube O.D (mm)	6	10	12
Designation	6M	10M	12M

Pipe Thread Designation

Size (inch)	1/8	1/4	3/8	1/2
Screw BSPT	2R	4R	6R	8R
Screw NPT	2N	4N	6N	8N

4. Plug Type

SO : Single Shutoff Type
DO : Double Shutoff Type

5. Body Material

SS : 316 Stainless Steel
B : Brass